



ASG PLASTERBOARD



DESCRIPTION

ASG PLASTERBOARD is a panel which generally used to form a ceiling. Plasterboard with the features of light weight but high strength, easy to install, clean and long serving life can be used for ceiling solution. Material needed during installation of plasterboard are stopping compound ceiling batten and drywall screw.



Tested and Approved
By **SIRIM & BOMBA**



TECHNICAL DATA

COLOUR	White
SIZE	4ft X 6ft
THICKNESS	9.5mm± / 12.5mm±
MATERIAL	Gypsum , Fibre
WEIGHT	9.5mm± - 16 kg ± per pc / 12.5mm± - 20kg ± per pc
PACKING	9.5mm± - 100 pcs per pallet 12.5mm± - 80 pcs per pallet

RECOMMENDED USE

Design Calculation For Plaster Ceiling Suspension System

- 9.5mm± Thick Plaster Board Using Zinalume 30mm x 9mm x 0.28mm±
- 12.5mm± Thick Plaster Board Using Zinalume 30mm x 9mm x 0.35mm±


CALCULATED BY
PROFESIONAL CIVIL ENGINEER

DESIGN CALCULATION FOR PLASTER CEILING SYSTEM FOR :-	
RECOMMENDED	
THICKNESS PLASTER BOARD	METAL CHANNEL
9.5MM±	30 mm x 9 mm x 0.28 mm±
12.5MM±	30 mm x 9 mm x 0.35 mm±

RECOMMENDED PLASTER MANUFACTURING SON BHD
NO.11A, JALAN KESAS
TAMAN DAMAI KOTA
SEKUTAN 43000 KL
017-2544444
info@asgplaster.com

APPLICATION INSTRUCTION

For 9.5mm± / 12.5mm± Plasterboard

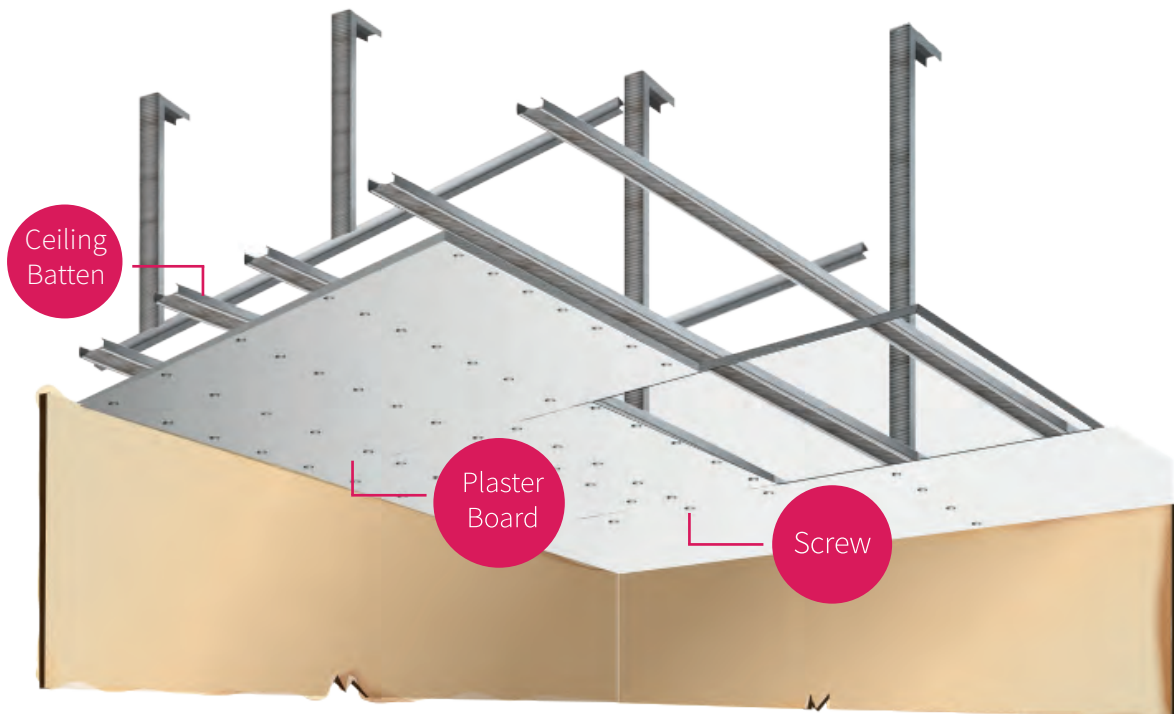

HEALTH & SAFETY

Note: The information of applications and suggestions for use is based on practical experience. As due to various site conditions and unable to control the applications, therefore no responsibility can be accepted by us for any loss and damaged as this data sheet is for general guidance only.

Note: ASG reserve the rights to revise any data without prior notice.

ASG[®]

Lot 8600, Batu11, Jalan Segenting,
Telok Panglima Garang, 42500 Selangor.

Tel: 603- 3122 8505/8515

Fax: 603- 3122 9505

HP: 6012- 3315160

Email: info@asgplaster.com
<https://www.asgplaster.com>