




ASG PLASTERBOARD MR

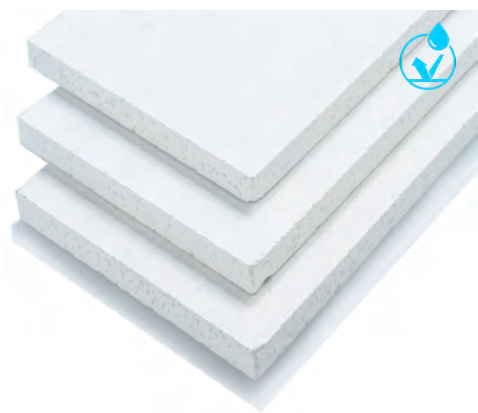

DESCRIPTION

ASG Moisture Resistance Plasterboard can be used on the bathroom wet area. Plasterboard with the features of light weight but high strength, easy to install, clean and long serving life can be used for ceiling solution. Material needed during installation of plasterboard are stopping compound, ceiling batten and drywall screw.



Tested and Approved
By **SIRIM & BOMBA**



TECHNICAL DATA

COLOUR	White
SIZE	4ft X 6ft
THICKNESS	9.5mm± or 12.5mm±
MATERIAL	Gypsum , Fibre , Silicone oil
WEIGHT	9.5mm± - 16 kg ± per pc / 12.5mm± - 20kg ± per pc
PACKING	9.5mm± - 100 pcs per pallet 12.5mm± - 80 pcs per pallet

RECOMMENDED USE

Design Calculation For Plaster Ceiling Suspension System

- 9.5mm± Thick Plaster Board Using Zincalume 30mm x 9mm x 0.28mm±
- 12.5mm± Thick Plaster Board Using Zincalume 30mm x 9mm x 0.35mm±

CALCULATED BY
PROFESSIONAL CIVIL ENGINEER




DESIGN CALCULATION FOR PLASTER CEILING SYSTEM FOR > RECOMMENDED	
THICKNESS PLASTER BOARD	METAL CHANNEL
9.5 mm±	30 mm x 9 mm x 0.28 mm
12.5 mm±	30 mm x 9 mm x 0.35 mm

BEESTAR PLASTER MANUFACTURING SDN BHD
NO 11A, JALAN 2/20B,
TAMAN SENGAL KOTA,
SEKUTAN, SEREMBAN,
43500 SEREMBAN



APPLICATION INSTRUCTION

For 9.5mm± / 12.5mm± Plasterboard

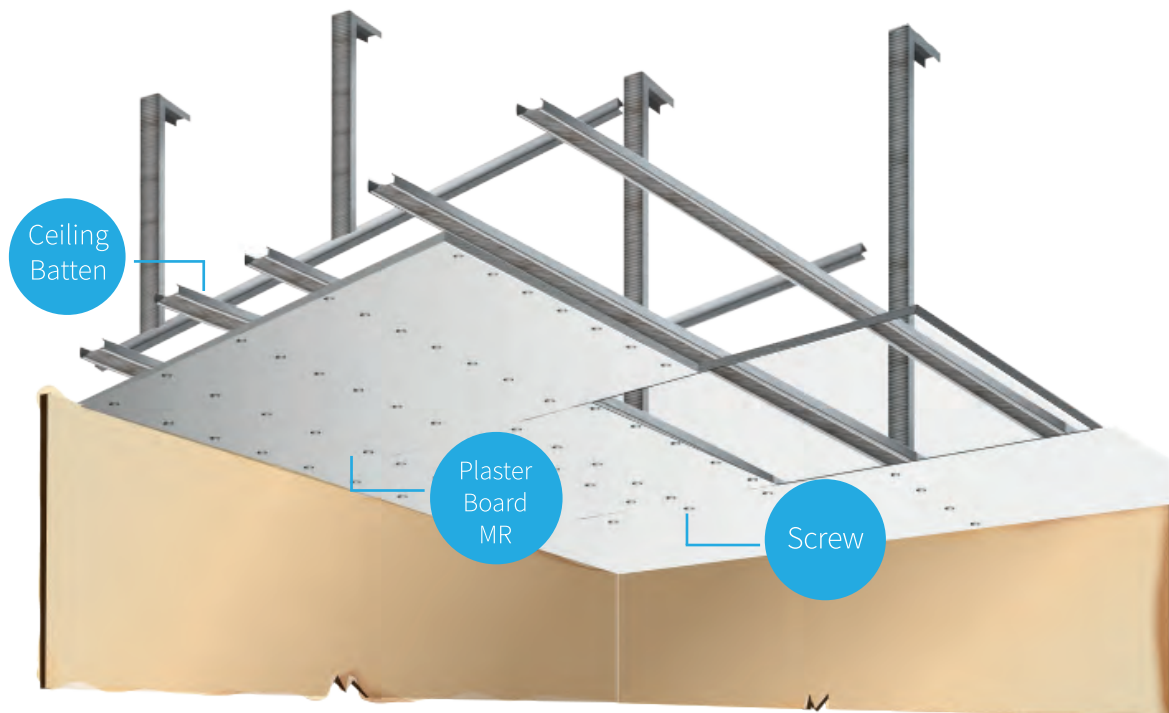

HEALTH & SAFETY

Note: The information of applications and suggestions for use is based on practical experience. As due to various site conditions and unable to control the applications, therefore no responsibility can be accepted by us for any loss and damaged as this data sheet is for general guidance only.

Note: ASG reserve the rights to revise any data without prior notice.

ASG[®]

Lot 8600, Batu11, Jalan Segenting,
Telok Panglima Garang, 42500 Selangor.

Tel: 603- 3122 8505/8515

Fax: 603- 3122 9505

HP: 6012- 3315160

Email: info@asgplaster.com
<https://www.asgplaster.com>